

ATS7200E

Audio reporting module (no ACK)

Communication devices

The advisor MASTER features a true communication centre offering multiple connections (4 Central Stations, each with 2 phone number) and various reporting protocols to report alarms and specified events. All advisor MASTER control panels have a PSTN communicator on board with optional ISDN, GSM, IP communication modules. It is scalable with back-up reporting options according your needs.


The advisor Advanced features a true communication centre offering multiple connections (16 Central Stations) and various reporting protocols to report alarms and specified events. All advisor Advanced control panels have a PSTN communicator on board (or IP and PSTN) with optional ISDN or GSM communication modules. It is scalable with back-up reporting options according your needs.

Product overview

The Advisor MASTER is capable of playing back recorded voice messages using the optional ATS7200E module. Two modules can be connected per control panel, each having a recording time of 35 seconds divided into 8 messages. Voice messages are programmed to report on the occurrence of specific reporting codes. Some reporting codes are general alarms (Burglar Alarm, Fire Alarm, Tamper Alarm ...), while others are zone specific, that is, you can link a reporting code to specific zones. This means any zone activation or event happening (including technical alarms) can trigger a voice message.

Voice reporting

A maximum of 2 voice reporting modules can be installed. There are 8 messages per module; the leader or opening message, the address or closing message and 6 alarm messages. If a second module is installed, all 8 messages for the second module will be alarm messages. The ATS7200E first reports the leader message (1) followed by the first alarm messages (3 to 8) and finally the address message (2). These are repeated up to 10 times and then the dialler disconnects and dials again until the maximum number of calls is reached. When a second ATS7200E is installed, all 8 messages of the second unit are alarm messages. Therefore messages 3 to 16 will be available for alarm messages.

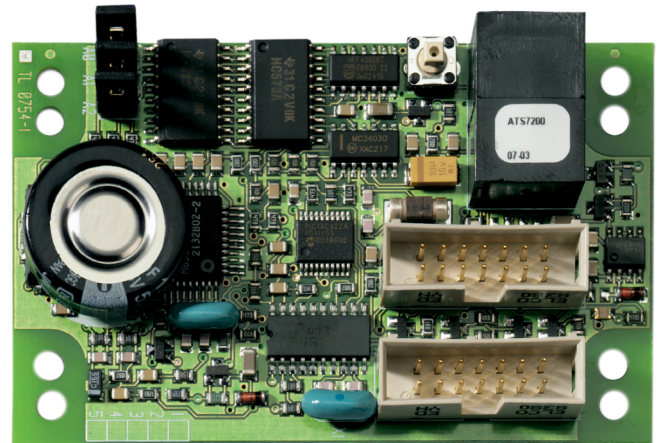

Details

- Opening message
- Closing message
- Up to 6 alarm messages
- No ACKnowledgement
- Non-volatile memory, temporary (min. 5 hours)

ATS7200E

Audio reporting module (no ACK)

Technical specifications

General

Product line	Advisor Advanced, ATS Master
--------------	------------------------------

Network

Communicator type	Voice / audio
-------------------	---------------

Audio

Recording capacity	8 messages (total recording time about 35 s)
--------------------	--

Electrical

Operating voltage	12 VDC
Power supply value	12 VDC via ribbon cable from control panel
Current consumption	50 mA

Physical

Physical dimensions	80 x 50 x 20 mm
Net weight	123 g

Environmental

Operating temperature	+10 to +50°C
-----------------------	--------------



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 5 May 2023 - 10:30