


# ATS1500AV-IP-MBC

Advisor Advanced 1500 IP panel VdS motherboard card

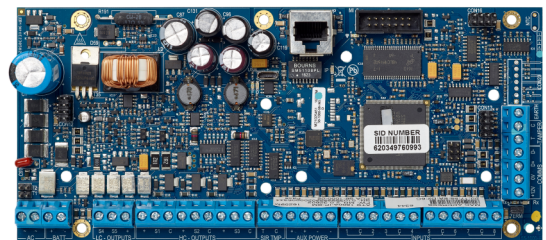

## Details

---

- Replacement board for ATS1500AV-IP panel

# ATS1500AV-IP-MBC

## Advisor Advanced 1500 IP panel VdS motherboard card

### Technical specifications

#### System

|                             |                               |
|-----------------------------|-------------------------------|
| Product line                | Advisor Advanced              |
| Product type                | Integrated Access Control     |
| Panel type                  | Hybrid                        |
| Kit                         | No                            |
| No. of keypads / readers    | 8                             |
| Data Gathering Panels (DGP) | 7                             |
| No. of alarm groups         | 16                            |
| Specified cable             | WCAT52 / WCAT54 or equivalent |

#### Inputs

|                          |    |
|--------------------------|----|
| Max no. of inputs        | 32 |
| Onboard inputs           | 8  |
| Inputs plug-in expansion | 8  |

#### Outputs

|                        |     |
|------------------------|-----|
| No. of outputs         | 128 |
| No. of onboard outputs | 5   |

#### Area

|              |   |
|--------------|---|
| No. of areas | 4 |
|--------------|---|

#### User / cards

|                       |               |
|-----------------------|---------------|
| Max. no. of users     | 50            |
| Users with name       | 50            |
| Max. no. of cards     | 2000 to 65532 |
| Max. no. of PIN codes | 2000 to 65532 |

#### Access control

|                                 |     |
|---------------------------------|-----|
| Standard doors on control panel | 4   |
| Door groups                     | 128 |

#### Communication

|                           |                                  |
|---------------------------|----------------------------------|
| Onboard transmission type | IP                               |
| Transmission extension    | GSM, GSM/GPRS, GSM/GPRS/IP, PSTN |
| Databus type              | RS485                            |

#### Event log

|                  |       |
|------------------|-------|
| Alarm event log  | 14500 |
| Access event log | 10000 |

#### Electrical

|                               |  |
|-------------------------------|--|
| Mainboard current consumption | 150 mA                                 |
| Max system current            | 950 mA at 13.8 V $\pm$ 0.2 V           |
| Max aux power current         | 350 mA (depends on backup power needs) |
| Auto-reset fuses              | 5                                      |

#### Physical

|                     |                  |
|---------------------|------------------|
| Physical dimensions | 202 x 90 x 40 mm |
| Housing             | No housing       |

#### Environmental

|                       |                   |
|-----------------------|-------------------|
| Operating temperature | -10 to +55°C      |
| Relative humidity     | 95% noncondensing |

#### Regulatory

|               |         |
|---------------|---------|
| Compliance    | CE      |
| Certification | CE, VdS |



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](https://firesecurityproducts.com) online or contact your sales representative.

Last updated on 5 May 2023 - 10:37