


CODE: **AWO306** v1.2/V
NAME: **28/TRP80/SATEL/GRADE 3**

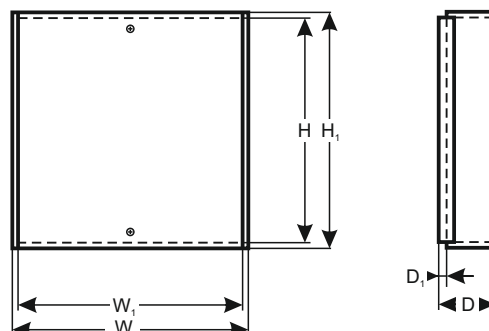

DESTINATION

Z 17Ah / 28Ah:

- 1) INTEGRA64, INTEGRA128, INTEGRA256 + 11x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)
- 2) INTEGRA64, INTEGRA128, INTEGRA256 + 2x CA-64PP (CA-64 OPS-OC, CA-64 OPS-R, CA-64 OPS-ROC) + 5x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)
- 3) INTEGRA64, INTEGRA128, INTEGRA256 + 4x CA-64EPS (CA-64 O, CA-64 ADR, CA-64 SR, CA-64 DR, VGM16, ETHM-1) + CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)
- 4) INTEGRA64, INTEGRA128, INTEGRA256 + 1x GSM4 (GSM5, GSM LT-1/LT2) + 9x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)
- 5) INTEGRA24, INTEGRA32 + 13x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)
- 6) INTEGRA24, INTEGRA32 + 2x CA-64PP (CA-64 OPS-OC, CA-64 OPS-R, CA-64 OPS-ROC) + 7x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)
- 7) INTEGRA24, INTEGRA32 + 4x CA-64EPS (CA-64 O, CA-64 ADR, CA-64 SR, CA-64 DR, VGM16, ETHM-1) + 3x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)
- 8) INTEGRA24, INTEGRA32 + 1x GSM4 (GSM5, GSM LT-1/LT2) + 11x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)

Modules:

- 1) 2x GSM4(GSM5) + 11x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)
- 2) 5x CA-64EPS (CA-64 O, CA-64 ADR, CA-64 SR, CA-64 DR, VGM16, ETHM-1) + 3x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)
- 3) 3x CA-64PP (CA-64 OPS-OC, CA-64 OPS-R, CA-64 OPS-ROC) + 7x CA-64E (CA-64SM, INT-RS, INT-FI, INT-VG, GPRS-T1)

TECHNICAL DATA

External dimensions of the enclosure:	W=460, H=550, D=175, D ₁ =20 [+/- 2mm]
External dimensions of the front panel:	W ₁ =455, H ₁ =555 [+/- 2mm]
Weight net/gross:	9,30kg / 9,60kg [+/-0,1kg]
Power supply:	230 V, 50 Hz (-/+15%)
Battery space:	28 Ah/12 V
Transformer:	TRP 80/16V/18V/20 in the case of PC/ABC in class UL94-V0, IP30
Output current TAMPER - max:	500mA@50 V DC
Operating environment:	class II, -10°C÷ 40°C
Material description:	sheet steel DC01, thickness: 1.0mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	enclosure is equipped with set including mounting bracket with tamper
Closing:	screwed
Notes:	distance from wall (mounting surface) - 20mm, easy door removal, hole for pigtail
Declaration, warranty:	CE, CLC/TS 50131-3:2003, 2 year from the production date